



## SPECIALTY NOZZLES Bronze & Stainless Steel

Durable, lightweight, rugged cast and machined in stainless steel or bronze. Wide range flow capacity from 30 to 125 GPM. Available in 1.0", 1.5" and 2.5" ball bearing female swivel with machined strainer/stream shaper, stainless steel ball or brass valve, anti-static, shockproof and thermo-insulated elastomer pistol grip and bumper guard. Stainless steel nozzles dielectric tested at 20,000 volts in conformance with NF S61 820. (If purchased for the use of electrical fires (DHT), the flush and straight stream flow are eliminated). Comes standard with a black pistol grip and bumper guard. Color coded pistol grip and bumper guard and air apirating foam attachment available.



**TURBOKADOR 500 DHT**  
Electrical Fire  
Stainless and Bronze





**TURBOKADOR 500 DHT**  
Electrical Fire  
Stainless Steel and Aluminum

Code	Description	W	H	L	Weight	FLOW	
						GPM	LPM
0235	TURBOKADOR in Stainless Steel and Bronze 1.5" inlet	3.5"	9.5"	12.0"	10 lb	40-80-125	200-300-500
8049	TURBOKADOR in Stainless Steel and Aluminum 1.5" inlet	3.5"	9.5"	12.0"	10 lb	40-80-125	200-300-500
8031	TURBOKADOR in Stainless Steel and Aluminum 1.5" inlet	3.5"	9.5"	12.0"	10 lb	30-80-125	150-300-500



**Petroleum Cargo Ship Nozzle**  
Made of bronze and stainless steel.  
Weight: 2.8 KG / 6.2 lb

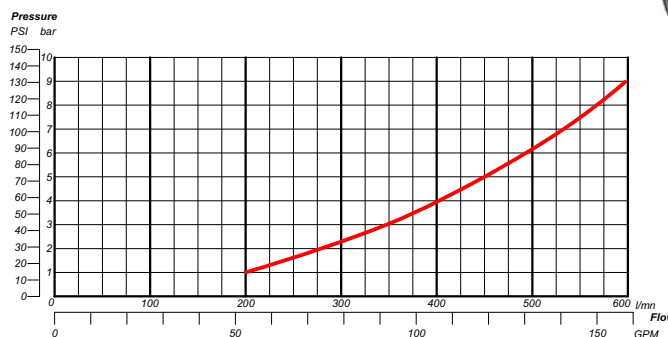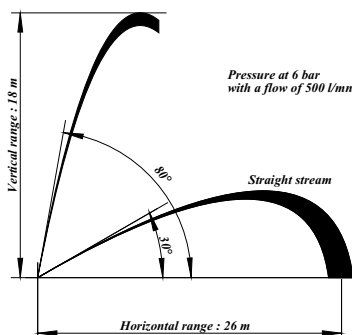

Code	Description
20049	2.5" BI inlet