


MERCATOR 3000

Flow: 1000 GPM @ 100 PSI - 3000 l/mn @ 7 bars
 Horizontal Range: Full 360°
 Vertical Range: +80° to -60°
 Vertical and Horizontal Travel Control Locking Handle
 Grease Fitting
 Waterway 3.0" with Anti -Turbulence Ribbing
 Made Primarily of Stainless Steel 10-8 AISI316L
 Rugged Construction against Corrosion, Marine Environment and Foam
 Flange or 2.5" inlet 2.5" outlet


Code	Description
3487	MERCATOR monitor with flange or 2.5" inlet 2.5" outlet
9771	MERCATOR monitor and smooth bore tube with flange or 2.5" inlet 2.5" outlet

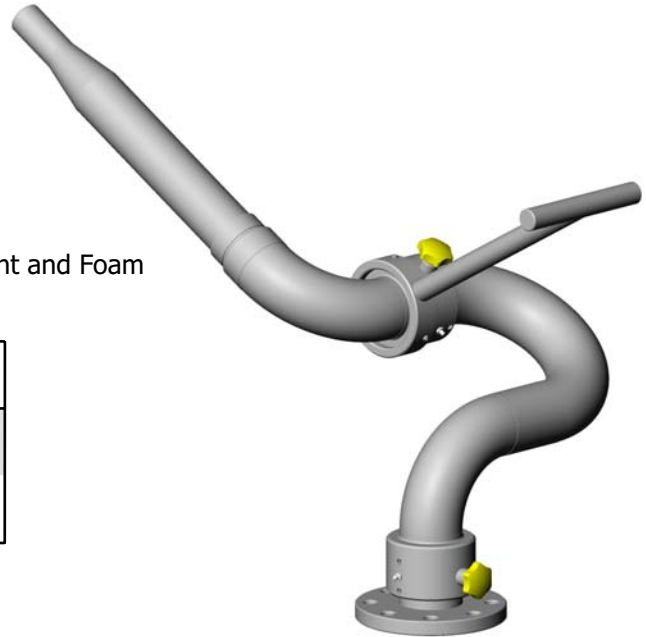

GERATOR 9000

Flow: 3000 GPM @ 100 PSI - 9000 l/mn @ 7 bars
 Horizontal Range: Full 360°
 Vertical Range: +80° to -80°
 Vertical and Horizontal Travel Control Locking Handle
 Grease Fitting
 Waterway 4.0" with Anti -Turbulence Ribbing
 Horizontal reach superior to 328 ft - 100 m
 Made Primarily of Stainless Steel 10-8 AISI316L
 Rugged Construction against Corrosion, Marine Environment and Foam
 Flange inlet flange or 4.0" outlet

Code	Description
12586	GERATOR monitor complete with water / foam tube

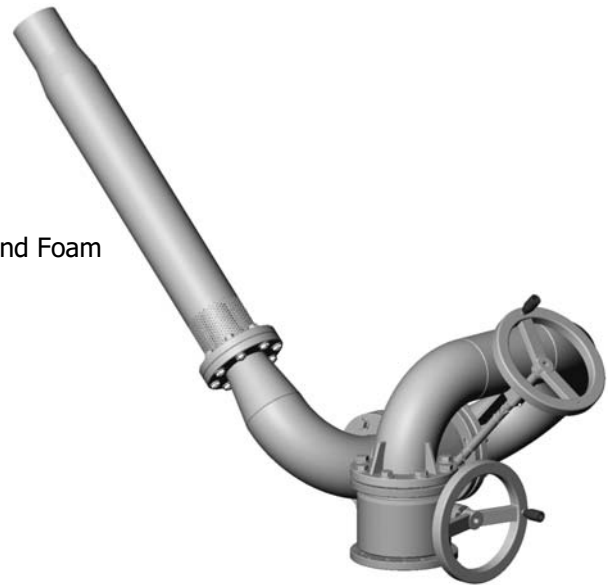

GERATOR 3000

Flow: 1000 GPM @ 100 PSI - 3000 l/mn @ 7 bars
 Horizontal Range: Full 360°
 Vertical Range: +80° to -80°
 Vertical and Horizontal Travel Control Locking Handle
 Grease Fitting
 Waterway 3.0" with Anti -Turbulence Ribbing
 Made Primarily of Stainless Steel 10-8 AISI316L
 Rugged Construction against Corrosion, Marine Environment and Foam
 Flange inlet 2.5" outlet

Code	Description
0390	GERATOR monitor complete with automatic master stream nozzle with or without self educting system

