



MONITORS on PORTABLE TRAILER

ANTENOR 3000 on PORTABLE TRAILER

Flow: 1250 GPM @ 100 PSI - 3000 l/mn @ 7 bars

Horizontal Range: +90° to -90°

Vertical Range: +90° to 0°

4 Support Anchor legs folding and Removable

Two Hose Racks and Storage

Removable Monitor

Vertical Travel Control Locking Handle

Grease Fitting

Waterway 3.0" with Anti -Turbulence Ribbing

Red Epoxy Finish

Made Primarily of Anodized Aluminum Heat-Treated against Corrosion,
Marine Environment and Foam

2.5" Clappered inlet 2.5" outlet



Code	Description
9796	ANTENOR monitor 2.5" inlet and 2.5" M outlet with one section of hose and trailer

MONITOR with MOBILE FOAM RESERVOIR

Flow: 1250 GPM @ 100 PSI - 3000 l/mn @ 7 bars

Horizontal Range: +90° to -90°

Vertical Range: +90° to 0°

4 Support Anchor legs

Storage Cabinet

Vertical Travel Control Locking Handle

Grease Fitting

Waterway 3.0" with Anti -Turbulence Ribbing

Red Epoxy Finish

Made Primarily of Anodized Aluminum Heat-Treated against Corrosion,
Marine Environment and Foam

Single or Double Axles 135 X 13 with or without brake and Fenders


Heavy Duty Suspension

Telescopic Goose Neck Hitch

Polyethylene Reservoir



Monitor with tank 135 gal / 500 lit.

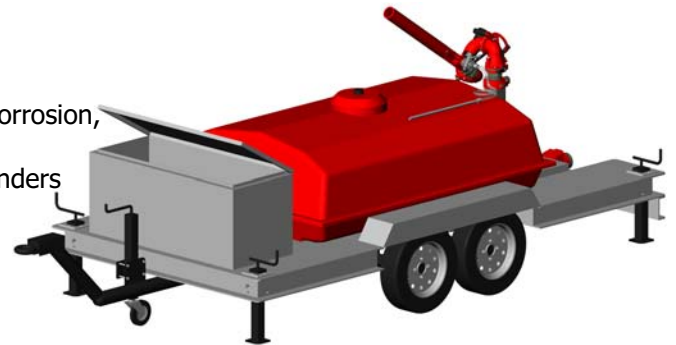

Monitor with tank 400 gal / 1500 lit.

Code	Description
7953	Monitor with reservoir on trailer 135 gal. / 500 lit.
8107	Monitor with reservoir on trailer 400 gal. / 1500 lit.



**Custom made trailers are available.
Please call us with your specific needs.**

MONITOR on Trailer

