





SNAKE STUMPY and LOFTY REMOTE CONTROLLED MONITORS

SNAKE STUMPY 1.5"

Flow: 50-350 GPM @ 100 PSI 180-1300 l/mn @ 7 bars
 Horizontal Range: 340°
 Vertical Range: -90° to +90°
 Weight: 28.6 lb - 13 kg
 Extremely Compact 11.0" X 8.0" X 18.0"
 12V or 24V Intrinsically Safe Motors with Manual Override
 Vertical and Horizontal Adjustable Safety Stop Pins
 Grease Fitting
 Waterway 1.5" with Anti -Turbulence Ribbing
 Made Primarily of Stainless Steel AISI 316 and Bronze Gear
 Rugged Construction against Corrosion, Marine Environment and Foam
 Flange or 1.5" inlet 1.5" outlet

Code	Description
17371	SNAKE STUMPY 1.5 complete with fog nozzle and joystick control

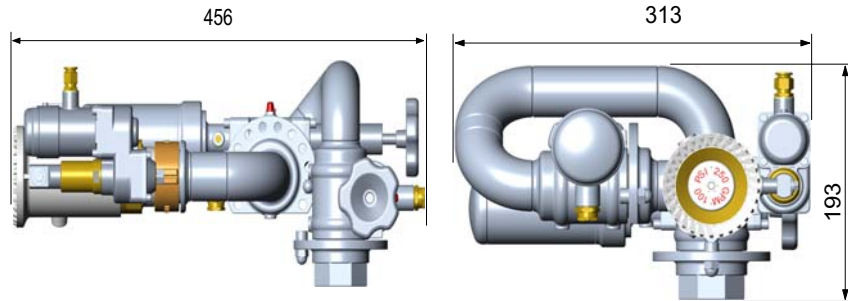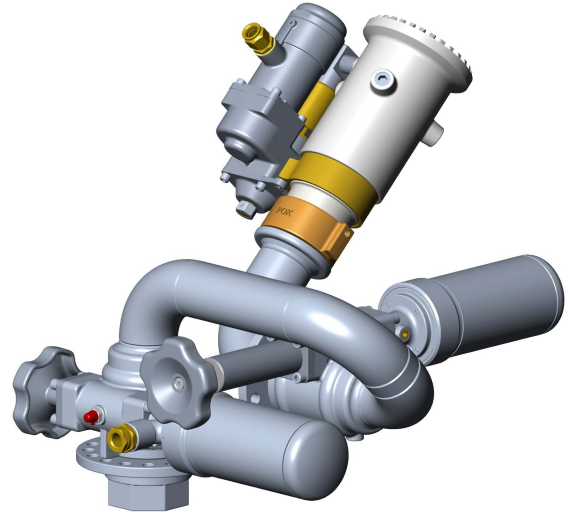

SNAKE STUMPY 2.5"

Flow: 350-1000 GPM @ 100 PSI 1300-3000 l/mn @ 7 bars
 Horizontal Range: 340°
 Vertical Range: -90° to +90°
 Weight: 57.2 lb - 26 kg
 Extremely Compact 11.0" X 8.0" X 18.0"
 12V or 24V Intrinsically Safe Motors with Manual Override
 Vertical and Horizontal Adjustable Safety Stop Pins
 Grease Fitting
 Waterway 1.5" with Anti -Turbulence Ribbing
 Made Primarily of Stainless Steel AISI 316 and Bronze Gear
 Rugged Construction against Corrosion, Marine Environment and Foam
 Flange or 2.5" inlet 2.5" outlet

Code	Description
17761	SNAKE STUMPY 2.5 complete with fog nozzle and joystick control

