




SNAKE LOFTY REMOTE CONTROLLED MONITORS

SNAKE LOFTY 4.0"

Flow: 1000-2000 GPM @ 100 PSI 3000-7500 l/mn @ 7 bars
 Horizontal Range: +180° to -180°
 Vertical Range: -90° to +90°
 12V or 24V Intrinsically Safe Motors with Manual Override
 Grease Fitting
 Waterway 4.0" with Anti-Turbulence Ribbing
 Red Epoxy Finish
 Made Primarily of Anodized Aluminum Heat-Treated against Corrosion,
 Marine Environment and Foam
 Flange or 4.0" inlet 3.5" outlet


Code	Description
18340	SNAKE LOFTY complete with fog nozzle and joystick control

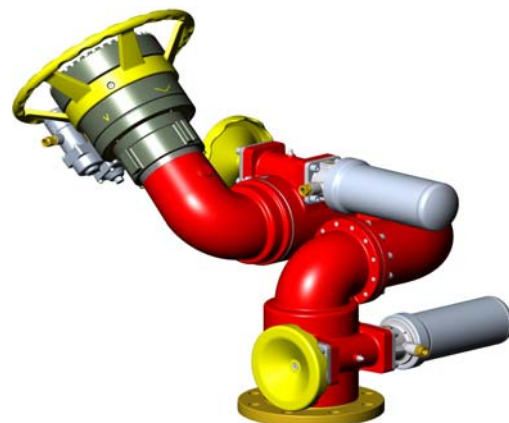

SNAKE LOFTY 9500

Flow: 2500 GPM @ 100 PSI 9500 l/mn @ 7 bars
 Horizontal Range: 340°
 Vertical Range: 0° to +90°
 Weight: 490 lb - 223 kg
 24V Intrinsically Safe Motors with Manual Override
 Grease Fitting
 Waterway 4.0" with Anti-Turbulence Ribbing
 Foam / Water Tube in Stainless Steel AISI 316
 Made Primarily of Stainless Steel AISI 316 and Bronze Gear
 Rugged Construction against Corrosion, Marine Environment and Foam
 Flange inlet and outlet

Code	Description
18326	SNAKE STUMPY 9500 complete with water/foam tube and joystick control

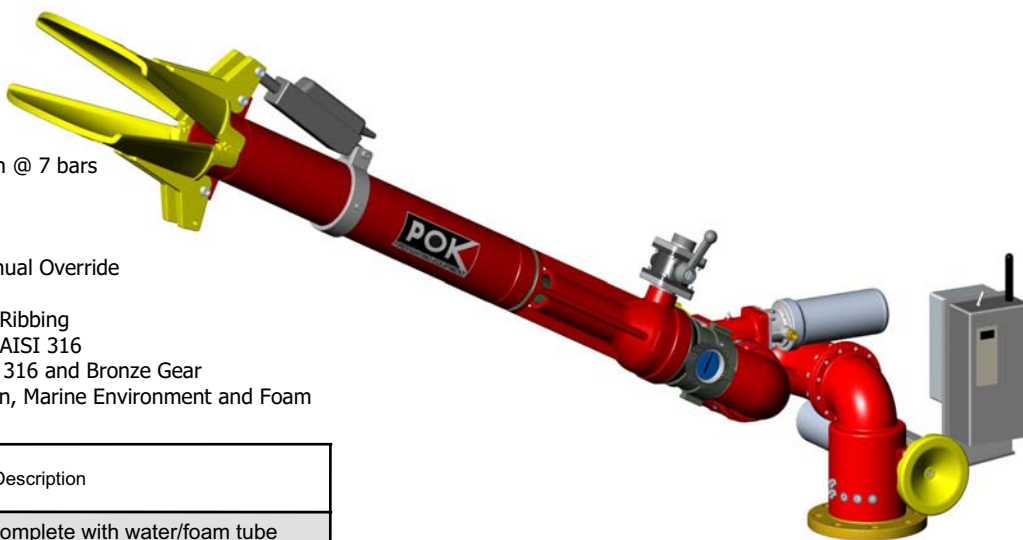

SNAKE LOFTY 15000

Flow: 4000 GPM @ 100 PSI 15000 l/mn @ 7 bars
 Horizontal Range: 340°
 Vertical Range: 0° to +90°
 Weight: 565 lb - 257 kg
 24V Intrinsically Safe Motors with Manual Override
 Grease Fitting
 Waterway 6.0" with Anti-Turbulence Ribbing
 Foam / Water Tube or Self-Educting in Stainless Steel AISI 316
 Made Primarily of Stainless Steel AISI 316 and Bronze Gear
 Rugged Construction against Corrosion, Marine Environment and Foam
 Flange inlet and outlet

Code	Description
18327	SNAKE STUMPY 15000 complete with water/foam tube or self-educting and joystick control

