



Nozzle For Hose Reel

Stream, Full Fog Twist Shutoff
in Durable POM (Delrin) Plastic
available with shank or threaded inlet

Description	Code
DN 19/6, female 3/4" - 0.112 Kg	25269
DN 25/8, female 1.0" - 0.112 Kg	22959
DN 33/12, female 1.0" - 0.265 Kg	23146
DN 19/6, hose shank 19 mm - 0.145 Kg	25842
DN 25/8, hose shank 25 mm - 0.155 Kg	25843
DN 33/12, hose shank 35 mm - 0.344 Kg	25844

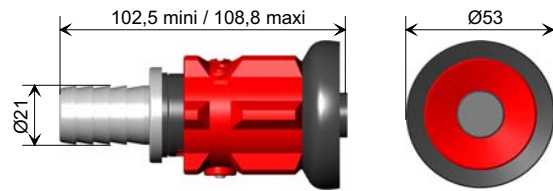


DN 19
DN 25

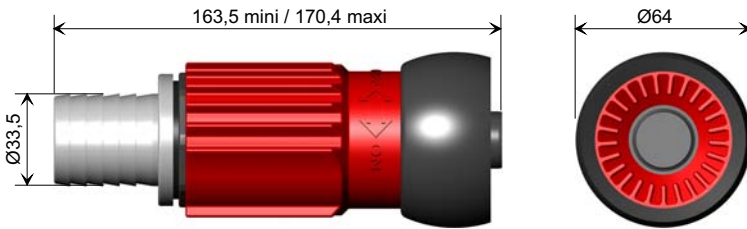

DN 33

Hose Shank Ø21 or Ø25

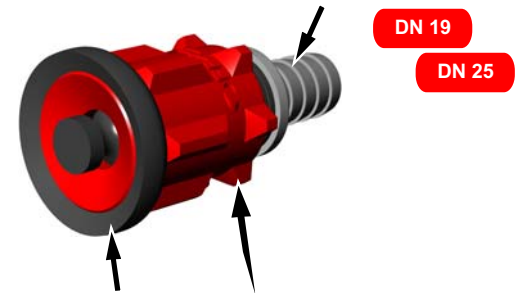

DN 19


DN 25

Bumber Guard

Twist for Fog to
Straight Stream
and Shut off

Bumber Guard

DN 33

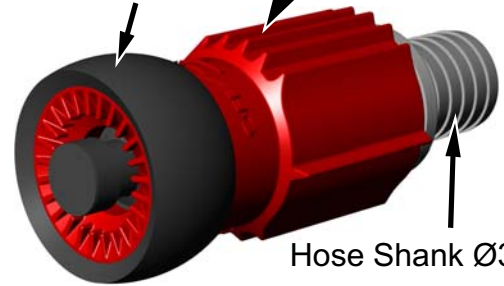


Hose Shank Ø33,5


Nozzle For Hose Reel

Stream, Full Fog Twist Shutoff in Brass
available with shank or threaded inlet

Description	Code
DN 19/6, female 3/4"	12007
DN 25/8, female 1.0"	12000
DN 33/12, female 1.0"	11930
DN 19/6, hose shank 19 mm	12059
DN 25/8, hose shank 25 mm	12061
DN 33/12, hose shank 35 mm	8046

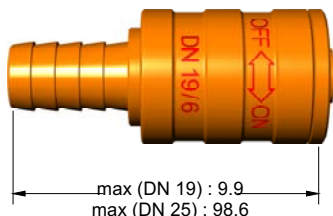

Weight DN 19 : 0.481 kg / 1.0 lbs
Weight DN 25 : 0.517 kg / 1.1 lbs
Weight DN 33 : 1.080 kg / 2.3 lbs

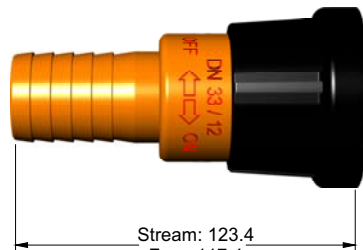

Stream: 123.4
Fog: 117.4
Closed: 115.6



TIP IN BRASS
DN19/6



TIP IN BRASS
DN33/12