

Here is the answer...

**The New COMBIPOK?
inner bore #14196**


1.5" F inlet X 1.5" M outlet
1 3/8" waterway
Length: 4.0"
Weight: 1.3 lb

Open your shutoff valve and
now you have a solid bore...

**Reach and Penetration
Of a Solid Bore at all
ranges of pressure from
as low as 40 PSI**

Slide the COMBIPOK?
ring toward you and now enjoy...

**FULL Fog Pattern of 130°,
flow 100 GPM @ 100 PSI
and maintaining your
Reach and Penetration
of a Solid Bore**

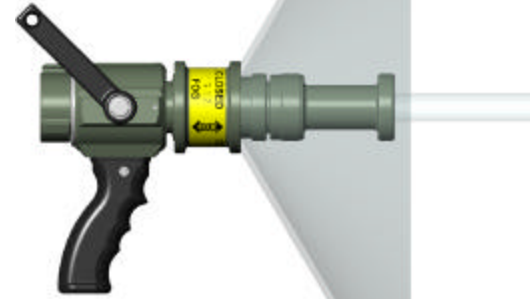

PERSONALIZED THE COMBIPOK? TO YOUR PREFERENCE:

1. Your Shutoff Style

- 9985 POK shutoff 1 3/8" waterway 1.5" inlet and outlet
- 9986 POK shutoff 1 3/8" waterway 2.5" inlet and 1.5" outlet
- 9990 POK shutoff with pistol grip 1 3/8" waterway 1.5" inlet and outlet
- 9987 POK shutoff with pistol grip 1 3/8" waterway 2.5" inlet and 1.5" outlet
- 9988 POK shutoff with twin pistol grip 1 3/8" waterway 2.5" inlet and 1.5" outlet

2. Your Shutoff Valve Handle Style

Aluminum, Polyurethane and Horseshoe style in Brass Chrome plated

3. Your Ball Valve Style

Aluminum, Polyamid II, and Stainless Steel.

4. Your Pistol Grip and/or Shutoff Valve Cover Colors.

Black, Red, Orange, Yellow, Green, Turquoise, Blue and White.

5. Your Choice of Solid bore Tips to be Mounted on your New COMBIPOK?

3/8", 1/2", 5/8", 3/4", 7/8", 15/16", 1.0", 1 1/4" and 1 3/8"